

SPECIFICATION & TECHNICAL INFORMATION SHEET



PHP Item Number: PSE Custom

DESCRIPTION:

The **PSE Custom** is designed to support multiple pipes at any specified height or width. The support is designed for installation without roof penetrations, flashings, or damage to the roofing material. The supports can be used on virtually any roofing system from flat roofs to sloped roofs up to 2 in 12. The supports should be spaced according to the specifications. Seismic and High-Wind applications are available for the system.

INSTALLATION PROCEDURE:

1. Separate material per designated tag.
2. Layout isolation pads, (provided by contractor), according to the design and layout.
3. Place bases on isolation pads.
4. Insert legs of pipe support into bases and attach with 2-1/2" bolt and 1/2" nut.
5. Space out pipe supports according to specifications. This should be done before any pipe is supported.
6. **IF BRACING IS REQUIRED**, attach horizontal bracing to legs of pipe supports, (approximately 3/4" of the way up the height of the support), with 3" bolts and 1/2" nut.
NOTE: If double or triple bracing is required, designated locations will be marked on support legs.
7. Remove bottom half of clevis hanger.
8. Insert insulation protection shield between the bottom half of the hanger and insulated pipe.
9. Reattach the bottom half of hanger to the top half of the hanger.
10. Adjust height of hanger so the hanger is supporting pipe. Adjust height of hanger by turning nut at top of allthread; clockwise to raise, counter-clockwise to lower.
NOTE: Over adjusting will cause excess weight on support.
11. Repeat step 9 on each support in the system; making sure pipe and supports are level, both vertically and horizontally, and proper spacing is maintained per design specifications.
12. Check that weight of pipe is distributed evenly throughout the system.

STORAGE:


Store in the original, unopened containers, under cover, until needed for installation.

LEED INFORMATION:

Frame/Steel

Post Consumer Recycled Content: 0%

Post Industrial Recycled Content: 25%

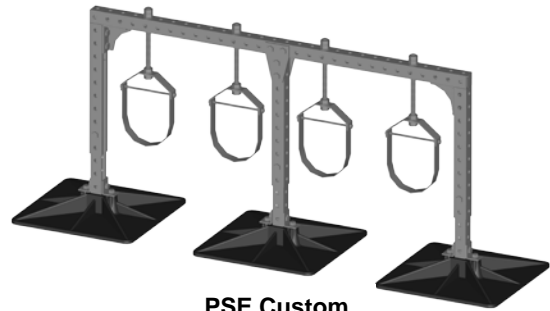

PSE Custom

BASE MATERIAL:

Post Consumer Recycled Content: 80%

Post Industrial Recycled Content: 20%

Manufacturing Location:

PRODUCT DATA:

Property:

Base:

Size:

18" x 18" x 3", 18" round

Weight:

7 lbs and 10-1/2 lbs

Base Material:

Injection molded high density/high impact polypropylene with UV-inhibitors and Antioxidants

Base Color:

Black

Base Density:

55.8 lb/cu ft (894 kg/cu m)

Rod Type:

Diameter:

1/2" and 5/8"

Length:

As required

Finish:

Hot Dip Galvanized or Stainless Steel

Hanger Type:

Finish:

Clevis, Roller or Band
Hot Dip Galvanized

Carbon Steel and Stainless Steel Framing:

Channel Types:

1-5/8" (41.3 mm) or 1-7/8" (47.6 mm) as required by loading

Form:

Roll-formed 3-sided tubular shape, perforated with 9/16" (14.3 mm) holes at 1-7/8" (47.6 mm) centers on three sides

Thickness:

12 gauge (2.7 mm)

Carbon Steel Finish:

Hot dip galvanized per ASTM A 123

Stainless Steel Finish:

Mill Finish

Hardware:

Nuts, Bolts and Washers: Hot Dip Galvanized or Stainless Steel

PHP Systems/Design
5534 Harvey Wilson Drive
Houston, TX 77020

Tel: (800) 797-6585 or Local (713) 672-5088

Fax: (713) 672-1170

www.phpsd.com

info@phpsd.com

This sheet is meant only to highlight PHP Systems/Design products and specifications. Information is subject to change without notice. PHP takes responsibility for furnishing quality materials, which meet published product specification. As neither PHP itself, nor its representatives practice architecture, PHP offers no opinion on, and expressly disclaims any responsibility for the soundness of any structure on which its products may be applied. If questions arise as to the soundness of structure, or its ability to support planned installation properly, the Owner should obtain opinions of competent structural engineers before proceeding. PHP accepts no liability for any structural failure or for resultant damages, and no PHP Representative is authorized to vary this disclaimer.